


E-BXMC 2408

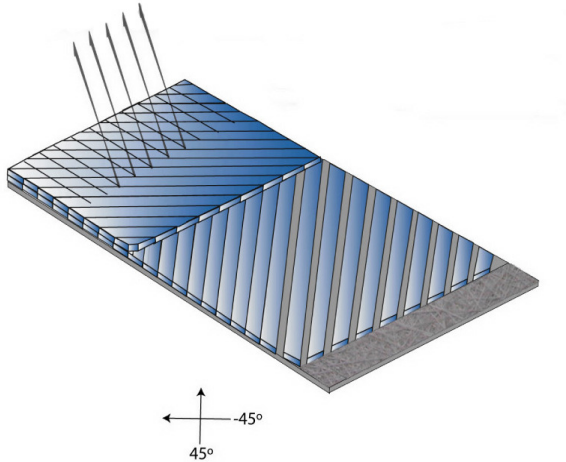

Fiber Type: E-Glass
 Architecture: +45°/-45° Double Bias
 Dry Thickness: 0.057 in. / 1.46 mm
 Total Weight: 32.93 oz/sq.yd / 1117 g/sq.m

Roll Specifications			Fiber Architecture Data	
Roll Width: 50 in. / 1270 mm	Roll Weight: 223 lbs / 101 kg	Roll Length: 78 yd / 71 m	0 ° : n/a	
			45 ° : 12.21 oz/sq.yd / 414 g/sq.m	
			90 ° : n/a	
			- 45 ° : 12.21 oz/sq.yd / 414 g/sq.m	
			Chopped Mat: 8.1 oz/sq.yd / 275 g/sq.m	
			Polyester Stitching: 0.41 oz/sq.yd / 14 g/sq.m	

* Packaging: Box or Bag

DNV & Lloyds certification does not apply to all materials

*****Shelf Life is 1 year (approx.) @ 70° F and 65% RH.**



Vectorply Corporation
 3500 Lakewood Drive Phenix City, AL 36867
 tel. 334-291-7704 fax. 334-291-7743

Disclaimer:

The customer is solely responsible for determining the performance and fitness for a particular use of any product produced by customer utilizing a reinforcement fabric or material produced or manufactured by Vectorply Corp. Specifications of reinforcements may change without notice.